

JPAK-AM-600-05LS-15RO-RAX 4G/5G CAGE ASSEMBLY


JPAK-AM-600-05LS-15RA-RAX-5 CAGE ASSEMBLY

For small cell 7" to 15" diameter canister antennas

The JPAK-AM-600-05LS-15RO-RAX-5 application is a distinctive design providing a solid 4G/5G mounting solution for light poles 3" to 5" in diameter. This mount comes with an Antenna and 5G-Radio cage, base mount and stainless steel hardware to complete the installation. For added concealment, we provide an FRP canister and steel shroud below with a conical design for aesthetics.

Other steel shrouds designs are available upon request.


This assembly supports 5G radios and all 4G canister antenna makes and models.

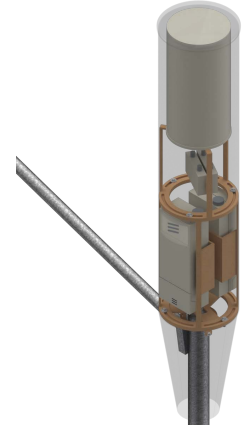

Specifications	
Model Number	JPAK-AM-600-05LS-15RO-RAX-5
Mounting Type	Light pole
Color	Mesa Brown (Other color options available)
Material	Steel
Environmental Conditions	Outdoor
Load Rating / Installed Antenna weight (Max)	170 lbs.
Mounting Bracket Assembly Weight	66.5 lbs.
Dimensions	H 65.5" X DIA. 15"
S.S Mounting Hardware for cage, base mount and metal shrouds	Supplied with Bracket
Antenna Model Applicability	All OEM Models
Cage Antenna configuration Types	All OEM Models



Outline Dimensions

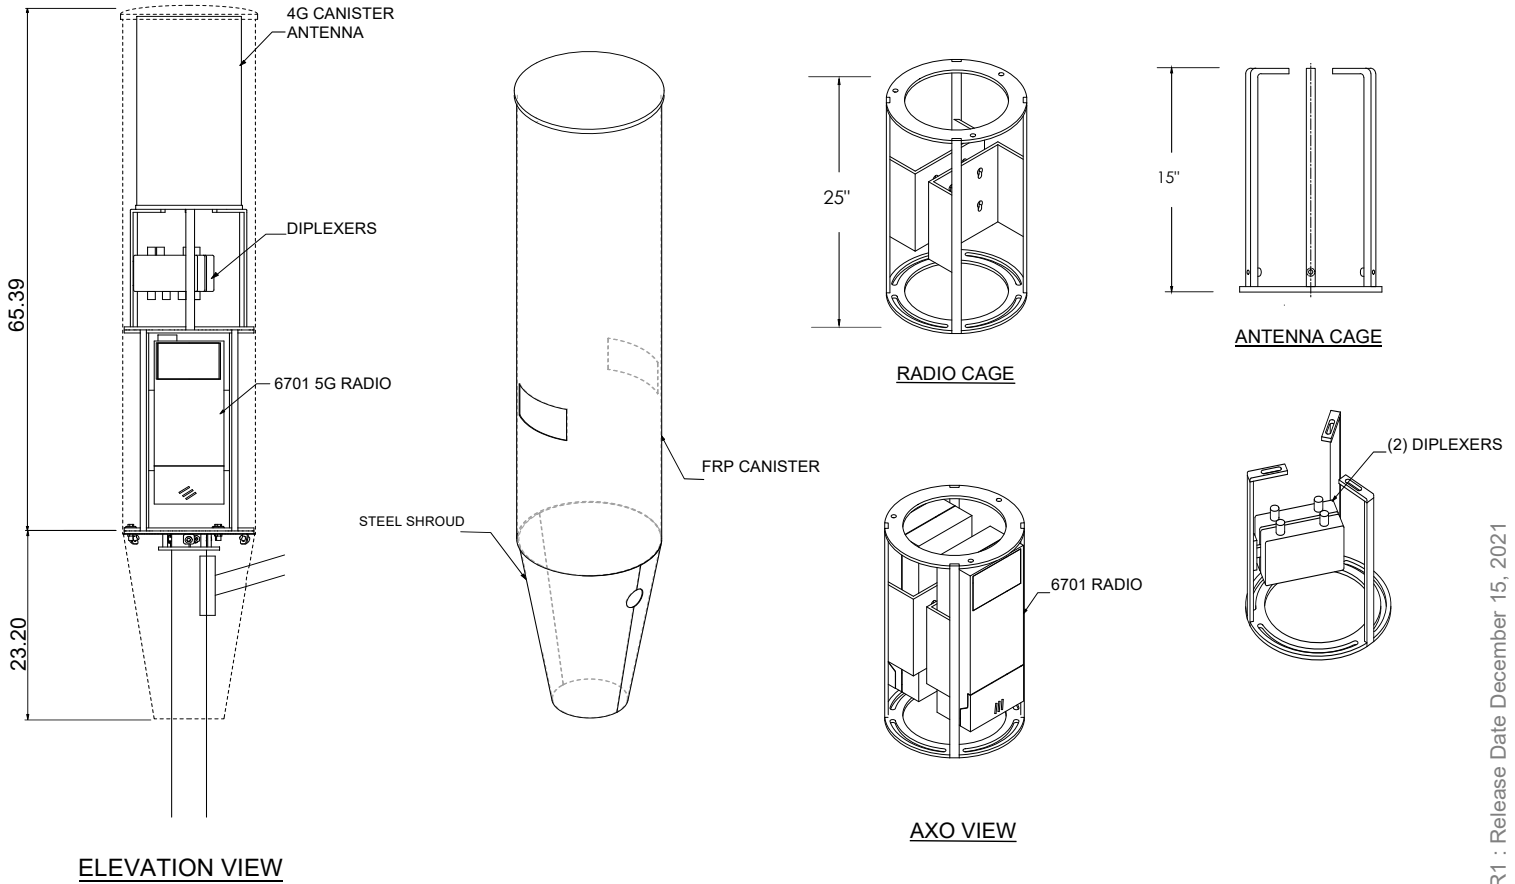

JPAK-AM-600-05LS-15RO-RAX-5 MOUNT DIMENSIONS

JPAK-AM-600-05LS-15RO-RAX-5 Mounting Kit Contents

ITEM #	PART#	DESCRIPTION	QTY
1	SS-12-3	S.S. THREADED ROD 1/2" X 3"	3
2	SS-CS-38-114	S.S. FHCS 3/8 X 1-1/4"	3
3	TFN-W	TEFLON WASHER	3
4	SS-TB-12-112	S.S. TAP BOLT 1/2" X 1-1/2"	6
5	SS-N-12	S.S. NUT 1/2"	9
6	SS-LW-12	S.S. LOCK WASHER 1/2"	12
7	SS-FW-12	S.S. FLAT WASHER 1/2"	6
8	SN-38	SPRING NUT 3/8"	3
9	SS-CS-14-34	S.S. FHCS 1/4" X 3/4"	6

Please contact MWS engineering (eng@mwscorp.net: 877-697-2677) for questions regarding this product or other models you may be interested in.

Made in the U.S.A.