JPAK-EM-E67-LP Light Pole Radio Segment Mount

JPAK-EM-E67-LP LIGHT POLE RADIO MOUNT

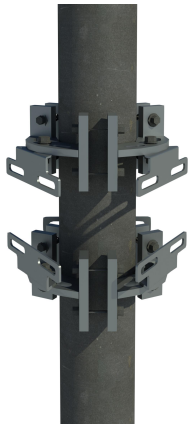

For small cell 5G Radios

The JPAK-EM-E67-LP is a clamp segment mount specifically design and manufactured for the Ericsson 6701 Antenna/Radio 5G solution. The mounts attaches directly to an existing light pole from 3” to 6” in diameter eliminating the need for a new pole, foundation or other infrastructure.

The mount comes galvanized but is available in other colors.

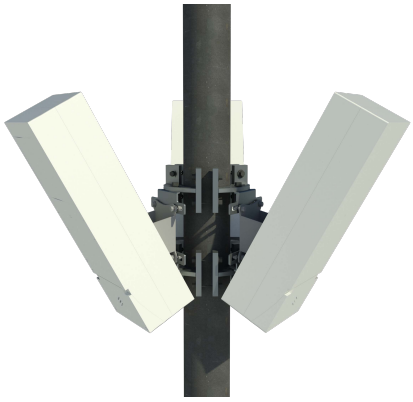

Specifications	
Model Number	JPAK-RM-E67-LP
Mounting Type	Light pole
Color	Galvinized (Other color options available)
Material	Steel
Environmental Conditions	Outdoor
Load Rating / Installed Radio weight (Max)	350 lbs.
Mounting Bracket Assembly Weight	17.5 lbs.
Dimensions	H 4.5" X DIA. 8.5" X D 2"
Mounting Hardware for Segmment Clamps	Supplied with Bracket
Radio Model Applicability	5G Radio Models

JPAK-EM-E67-LP : Revision R2 : Release Date August 11, 2020

Micro Wireless Solutions™ All rights reserved.

Outline Dimensions

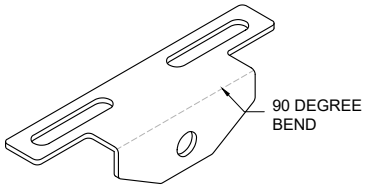

RADIO BRACKET (TYP) 6

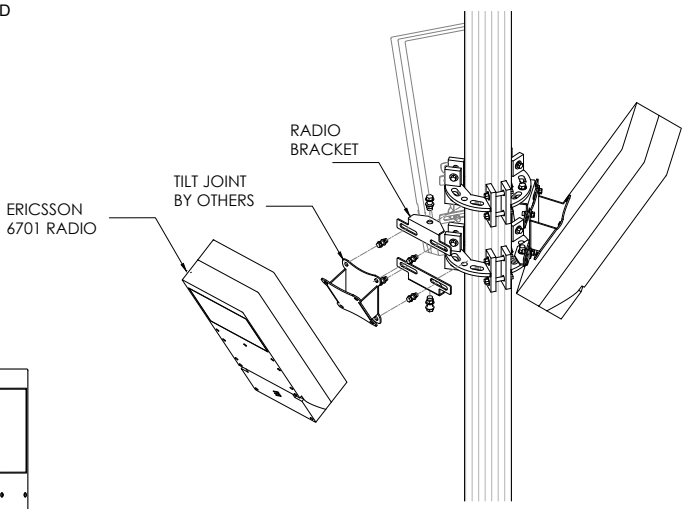

ISOMETRIC VIEW

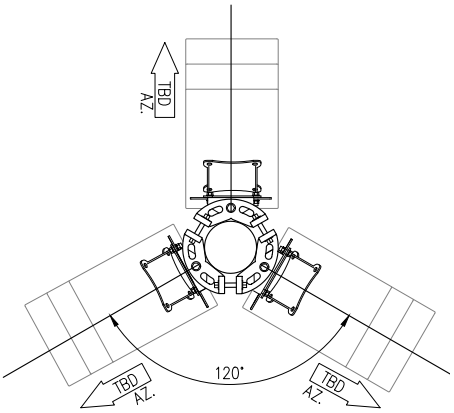

TOP VIEW

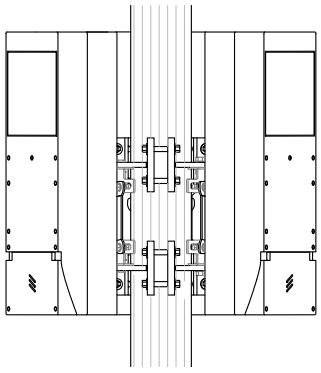

ELEVATION VIEW



SEGMENT CLAMP TOP VIEW

JPAK-EM-E67-LP MOUNT DIMENSIONS

JPAK-EM-E67-LP Mounting Kit Contents

ITEM #	PART#	DESCRIPTION	QTY
1	G-HHB-12-3	HDG Hex Head Bolt 1/2" x 3"	12
2	G-HHB-12-312	HDG Hex Head Bolt 1/2" x 3-1/2"	12
3	GW-12	GALVINIZED WASHER 1/2"	12
4	GLW-12	GALVINIZED LOCK WASHER 1/2"	12
5	HDG-HHB-38-114	HDG Hex Head Bolt 3/8" x 1-1/4"	6
6	GFW-38	GALVINIZED FLAT WASHER 3/8"	12
7	GLW-38	GALVINIZED LOCK WASHER 3/8"	6
8	HDG-N-38	HDG NUT 3/8"	6

Please contact MWS engineering (eng@mwscorp.net: 877-697-2677) for questions regarding this product or other models you may be interested in.

Made in the U.S.A.

Micro Wireless Solutions™ All rights reserved.